

R D H

MINING  EQUIPMENT



SPRAYMASTER 600 SHOTCRETE SPRAYER

Engine

Model Deutz D914L06

Transmission






Model Dana Powershift 20000 Series

Operating Specifications

Machine Weight.....29,000 lbs / 13155 kg

RDH SPRAYMASTER 600 SERIES

TECHNICAL SPECIFICATIONS

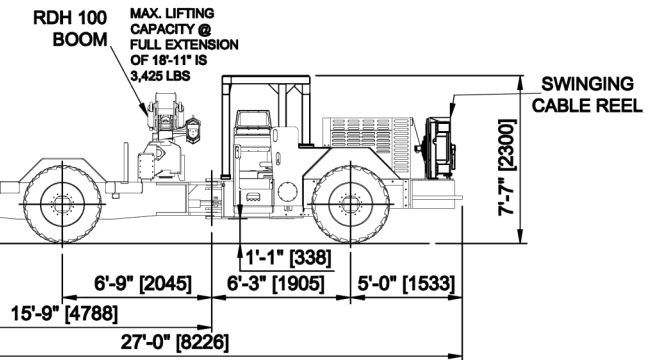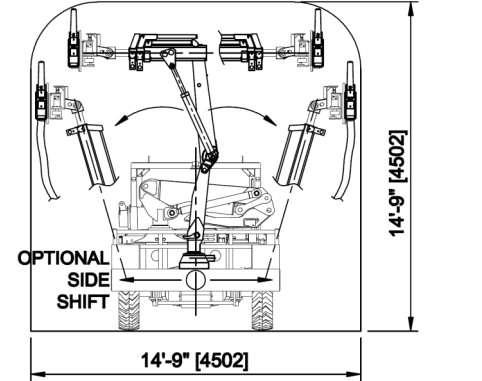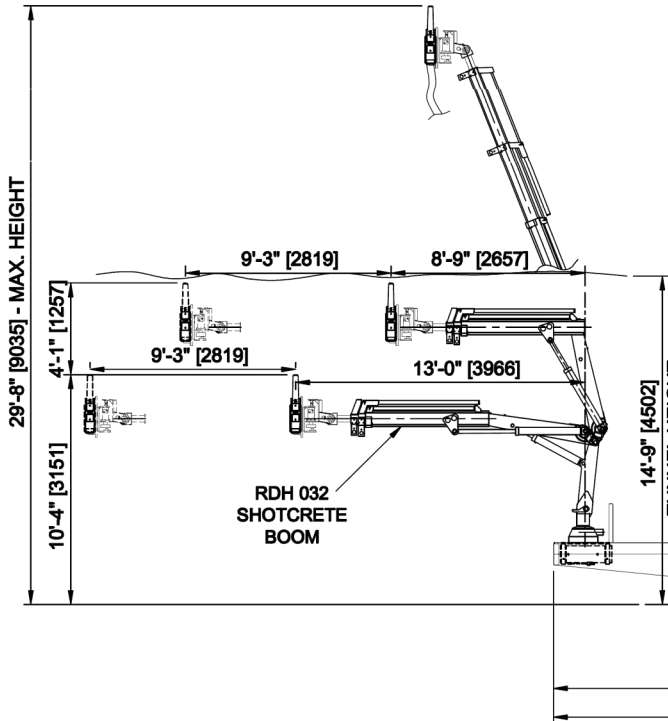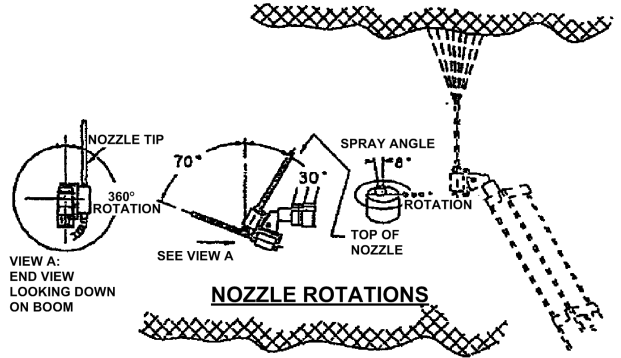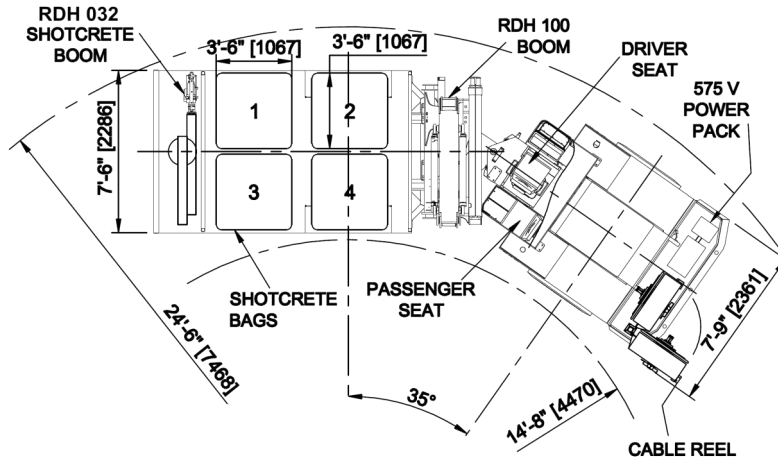

ENGINE

TYPE/MODEL	Deutz D914L06, diesel, air-cooled, in-line, 6 cylinder
EXHAUST	Catalytic purifier with silencer
ELECTRICAL	24 V
AIR INTAKE	Donaldson two-stage, dry-type with service gauge

TRANSMISSION

TYPE	Clark 20000 series, 3 speed forward and reverse, powershift
------	-------------------------------------------------------------

AXLES

MODEL	Dana 176
OPTIONAL	Dana 113

TIRES

SIZE	10.00 x 20
------	------------

HYDRAULIC SYSTEM

Full hydraulic power steering, center articulated with double acting steering cylinder. Open center system with gear pump & pilot operated joystick steer control.

FEATURES

Spray boom with oscillating head, umbilical remote control and 30' of cable.

OPERATING WEIGHT (INCL. CANOPY)

29,000 lbs	13,155 kg
------------	-----------

OPTIONS

ENGINE	TCD914L06, air-cooled, turbo-charged Mercedes 904, water-cooled Cummins QSB4.5, water-cooled
CANOPY	MSHA, ROPS, FOPS / Telescoping
ENCLOSED CAB	Fully enclosed, A/C, heater, wipers, fan
PRESSURE WASHER	On-board electric pressure washer with hose reel & wand
BOOM	Optional models / sliding boom for greater coverage area
FORM OIL	Form oil spray kit with reel
FIRE SUPPRESSION	Manual/Automatic—Ansul 4 nozzle
CUSTOM	Other options/custom-built equipment available



ISO 9001-2008
REGISTERED

CWB CERTIFIED

Manufactured by:
904 Hwy 64 Alban, ON
Canada P0M 1A0

Tel: (705) 857-2154 Fax: (705)857-3285
Email: sales@rdhminingequipment.com
Website: www.rdhminingequipment.com